



PL単焦点 SVシリーズ

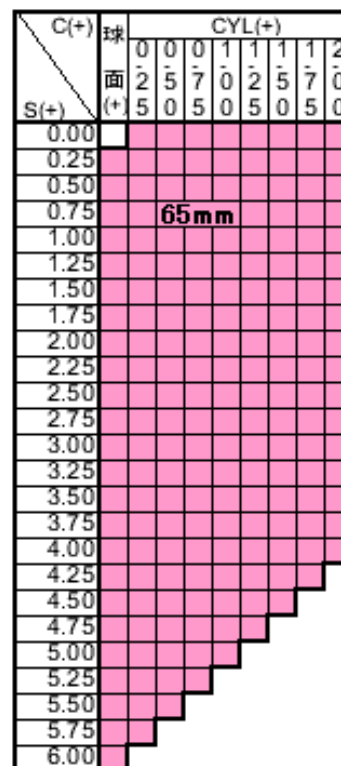


株式会社ティーエスエル

アボナール SV スプラッシュコート

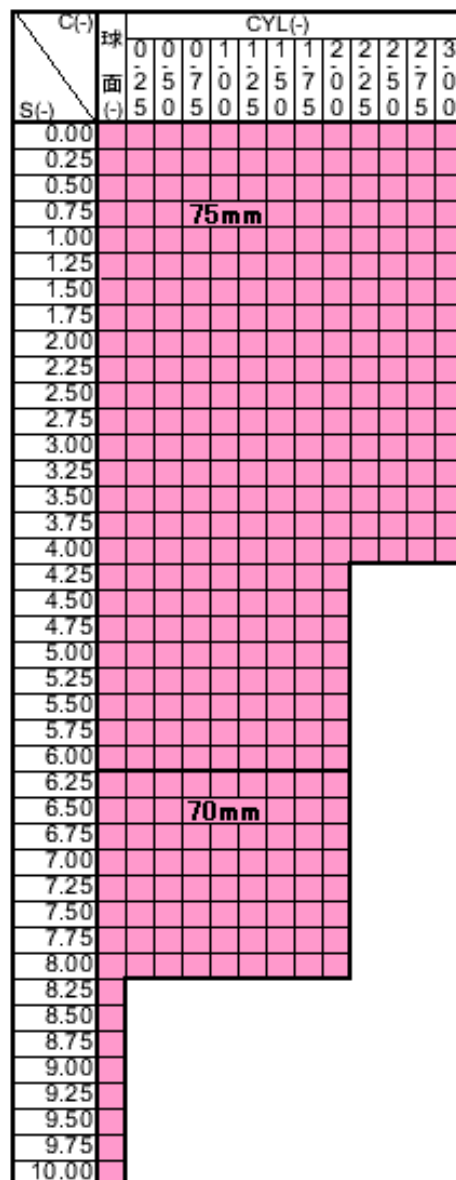

在庫範囲のみ



アボナール SV SPLは無色・在庫範囲の販売です。



※他品種との組合せはお受けできません。

品 名	アボナール SV SPL	MADE IN CHINA
材質	プラスチック(UV吸収剤練り混み基材)	
屈折率	1.60(球面設計)	
比 重	1.30	
アッベ数	42	
コート	新撥水スプラッシュコート	
反射色	グリーン	
透過率	98.5%	

アボナールSV (ne=1.60)

SPH	FC	ET	CT	SPH	FC	ET	CT
－				＋			
0.00	4.50	1.9	1.90	0.00			
0.25	4.25	2.2	1.80	0.25	2.05	1.50	1.8
0.50	4.00	2.4	1.70	0.50	2.30	1.50	2.0
0.75	3.75	2.7	1.70	0.75	2.55	1.50	2.2
1.00	3.50	2.9	1.60	1.00	2.80	1.50	2.4
1.25	3.75	3.3	1.50	1.25	3.05	1.10	2.3
1.50	3.50	3.5	1.40	1.50	3.30	1.10	2.5
1.75	3.25	3.6	1.15	1.75	3.55	1.10	2.7
2.00	3.00	3.9	1.15	2.00	3.80	1.10	3.0
2.25	3.25	3.8	1.15	2.25	3.15	1.10	3.2
2.50	3.00	4.1	1.15	2.50	3.40	1.10	3.4
2.75	2.75	4.4	1.15	2.75	3.65	1.10	3.6
3.00	2.50	4.7	1.15	3.00	3.90	1.10	3.8
3.25	2.75	5.0	1.15	3.25	4.15	1.10	4.0
3.50	2.50	5.3	1.15	3.50	4.40	1.10	4.3
3.75	2.25	5.6	1.15	3.75	4.65	1.10	4.5
4.00	2.00	6.1	1.15	4.00	4.90	1.10	4.7
4.25	2.50	6.2	1.15	4.25	5.15	1.10	4.9
4.50	2.25	6.6	1.15	4.50	5.40	1.10	5.1
4.75	2.00	6.9	1.15	4.75	5.65	1.10	5.4
5.00	1.75	7.3	1.15	5.00	5.90	1.10	5.6
5.25	2.00	7.6	1.15	5.25	6.15	1.10	5.8
5.50	1.75	7.9	1.15	5.50	6.40	1.10	6.0
5.75	1.50	8.2	1.15	5.75	6.65	1.10	6.2
6.00	1.25	8.5	1.15	6.00	6.90	1.10	6.4
6.25	2.15	8.0	1.15	FC=フロントカーブ (Nominal data) ET=コバ厚 ±0.2mm CT=中心厚 ±0.2mm			
6.50	1.90	8.3	1.15				
6.75	1.65	8.5	1.15				
7.00	1.40	8.7	1.15				
7.25	1.15	9.1	1.15				
7.50	0.90	9.3	1.15				
7.75	1.90	9.9	1.15				
8.00	1.65	10.1	1.15				
8.25	1.40	10.4	1.15				
8.50	1.15	10.6	1.15				
8.75	0.90	11.0	1.15				
9.00	0.65	11.2	1.15				
9.25	1.50	11.5	1.15				
9.50	1.25	11.9	1.15				
9.75	1.00	12.2	1.15				
10.00	0.75	12.5	1.15				

アボナールAS SV スプラッシュコート

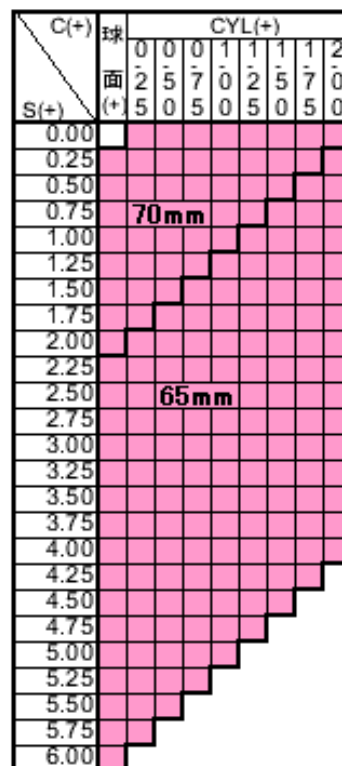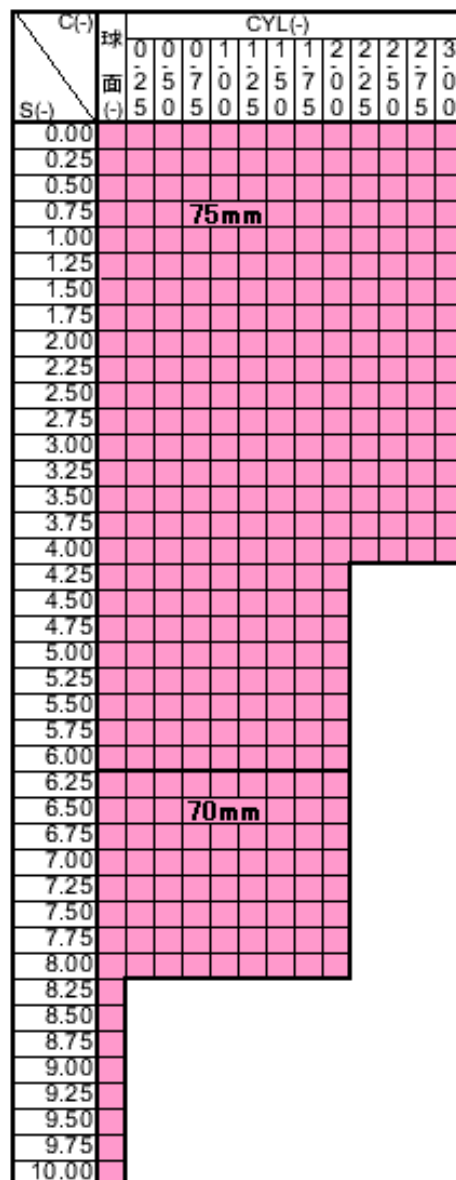

在庫範囲のみ



アボナールAS SV SPLは無色・在庫範囲の販売です。

※他品種との組合せはお受けできません。

品 名	アボナールAS SV SPL	MADE IN CHINA
材質	プラスチック(UV吸収剤練り混み基材)	
屈折率	1.60(非球面設計)	
比 重	1.30	
アツペ数	42	
コート	新撥水スプラッシュコート	
反射色	グリーン	
透過率	98.5%	

アボナールAS-SV (ne=1.60)

SPH	FC	ET	CT	SPH	FC	ET	CT
－				＋			
0.00	3.50	2.0	2.00	0.00			
0.25	3.25	1.9	1.50	0.25	3.75	1.50	1.6
0.50	3.00	2.2	1.50	0.50	4.00	1.50	1.8
0.75	2.75	2.5	1.50	0.75	4.25	1.50	2.0
1.00	2.50	2.8	1.50	1.00	4.50	1.50	2.3
1.25	2.75	2.6	1.15	1.25	4.75	1.10	2.1
1.50	2.50	2.9	1.15	1.50	5.00	1.10	2.3
1.75	2.25	3.1	1.15	1.75	5.25	1.10	2.5
2.00	2.00	3.4	1.15	2.00	5.50	1.10	2.7
2.25	2.25	3.9	1.15	2.25	4.65	1.10	2.9
2.50	2.00	4.1	1.15	2.50	4.90	1.10	3.1
2.75	1.75	4.2	1.15	2.75	5.15	1.10	3.3
3.00	1.50	4.5	1.15	3.00	5.40	1.10	3.5
3.25	2.25	5.0	1.15	3.25	5.65	1.10	3.7
3.50	2.00	5.2	1.15	3.50	5.90	1.10	3.9
3.75	1.75	5.5	1.15	3.75	6.15	1.10	4.1
4.00	1.50	6.0	1.15	4.00	6.40	1.10	4.3
4.25	1.75	6.2	1.15	4.25	6.65	1.10	4.5
4.50	1.50	6.4	1.15	4.50	6.90	1.10	4.7
4.75	1.25	6.6	1.15	4.75	7.15	1.10	4.9
5.00	1.00	6.9	1.15	5.00	7.40	1.10	5.1
5.25	1.25	7.3	1.15	5.25	7.15	1.10	5.3
5.50	1.00	7.5	1.15	5.50	7.40	1.10	5.5
5.75	0.75	7.8	1.15	5.75	7.65	1.10	5.6
6.00	0.50	8.1	1.15	6.00	7.90	1.10	5.8
6.25	1.25	7.5	1.15	FC=フロントカーブ (Nominal data) ET=コバ厚 ±0.2mm CT=中心厚 ±0.2mm			
6.50	1.00	8.0	1.15				
6.75	0.75	8.2	1.15				
7.00	0.50	8.4	1.15				
7.25	1.25	9.0	1.15				
7.50	1.00	9.3	1.15				
7.75	0.75	9.5	1.15				
8.00	0.50	9.7	1.15				
8.25	1.25	10.1	1.15				
8.50	1.00	10.5	1.15				
8.75	0.75	10.7	1.15				
9.00	0.50	10.9	1.15				
9.25	1.25	11.6	1.15				
9.50	1.00	11.8	1.15				
9.75	0.75	12.1	1.15				
10.00	0.50	12.3	1.15				

レシエンテ SV スプラッシュコート

C(-)	球面 (-)	CYL (-)											
S(-)	0	0	0	1	1	1	1	2	2	2	2	3	
	5	0	5	0	5	0	5	0	5	0	5	0	
0.00													
0.25													
0.50													
0.75													
1.00													
1.25													
1.50													
1.75													
2.00													
2.25													
2.50													
2.75													
3.00													
3.25													
3.50													
3.75													
4.00													
4.25													
4.50													
4.75													
5.00													
5.25													
5.50													
5.75													
6.00													
6.25													
6.50													
6.75													
7.00													
7.25													
7.50													
7.75													
8.00													
8.25													
8.50													
8.75													
9.00													
9.25													
9.50													
9.75													
10.00													

C(+)	球面 (+)	CYL (+)											
S(+)	0	0	0	1	1	1	1	2	2	2	2	3	
	5	0	5	0	5	0	5	0	5	0	5	0	
0.00													
0.25													
0.50													
0.75													
1.00													
1.25													
1.50													
1.75													
2.00													
2.25													
2.50													
2.75													
3.00													
3.25													
3.50													
3.75													
4.00													
4.25													
4.50													
4.75													
5.00													
5.25													
5.50													
5.75													
6.00													

在庫範囲のみ

混合乱視												
0	0	1	1	1	2	C(-)						
5	7	0	2	5	7	S(+)						
0	5	0	5	0	5							
						0.25						
						0.50						
						0.75						
						1.00						
						1.25						
						1.50						
						1.75						

レシエンテ SV SPLは無色・在庫範囲の販売です。


※他品種との組合せはお受けできません。



品 名	レシエンテ SV SPL	MADE IN CHINA
材質	プラスチック(UV吸収剤練り混み基材)	
屈折率	1.67(非球面設計)	
比 重	1.37	
アッベ数	32	
コート	新撥水スプラッシュコート	
反射色	グリーン	
透過率	98.5%	

レシエンテSV (ne=1.67)

SPH	FC	ET	CT	SPH	FC	ET	CT
－				＋			
0.00	4.00	2.0	2.00	0.00			
0.25	3.75	2.1	1.90	0.25	3.75	1.50	1.8
0.50	3.50	2.4	1.90	0.50	4.00	1.50	1.8
0.75	3.25	2.4	1.60	0.75	4.25	1.50	2.1
1.00	3.00	2.5	1.40	1.00	4.50	1.30	2.1
1.25	3.25	2.5	1.20	1.25	4.75	1.30	2.2
1.50	3.00	2.8	1.15	1.50	5.00	1.30	2.3
1.75	2.75	3.0	1.15	1.75	5.25	1.10	2.3
2.00	2.50	3.3	1.15	2.00	5.50	1.10	2.5
2.25	2.75	3.6	1.15	2.25	4.75	1.10	2.7
2.50	2.50	3.9	1.15	2.50	5.00	1.10	2.9
2.75	2.25	4.0	1.15	2.75	5.25	1.10	3.1
3.00	2.00	4.3	1.15	3.00	5.50	1.10	3.3
3.25	2.25	4.6	1.15	3.25	4.75	1.10	3.5
3.50	2.00	4.8	1.15	3.50	5.00	1.10	3.7
3.75	1.75	4.9	1.15	3.75	5.25	1.10	3.9
4.00	1.50	5.3	1.15	4.00	5.50	1.10	4.1
4.25	1.75	5.6	1.15	4.25	5.75	1.10	4.3
4.50	1.50	5.9	1.15	4.50	6.00	1.10	4.5
4.75	1.25	6.0	1.15	4.75	6.25	1.10	4.7
5.00	1.00	6.1	1.15	5.00	6.50	1.10	4.8
5.25	1.25	6.6	1.15	5.25	6.75	1.10	5.0
5.50	1.00	6.8	1.15	5.50	7.00	1.10	5.3
5.75	0.75	7.1	1.15	5.75	7.25	1.10	5.5
6.00	0.50	7.3	1.15	6.00	7.50	1.10	5.6
6.25	1.00	7.0	1.15	FC=フロントカーブ (Nominal data) ET=コバ厚 ±0.2mm CT=中心厚 ±0.2mm			
6.50	0.75	7.2	1.15				
6.75	0.50	7.4	1.15				
7.00	0.25	7.6	1.15				
7.25	1.00	8.0	1.15				
7.50	0.75	8.2	1.15				
7.75	0.50	8.5	1.15				
8.00	0.25	8.7	1.15				
8.25	1.00	9.0	1.15				
8.50	0.75	9.2	1.15				
8.75	0.50	9.5	1.15				
9.00	0.25	9.7	1.15				
9.25	1.00	10.2	1.15				
9.50	0.75	10.4	1.15				
9.75	0.50	10.6	1.15				
10.00	0.25	10.8	1.15				

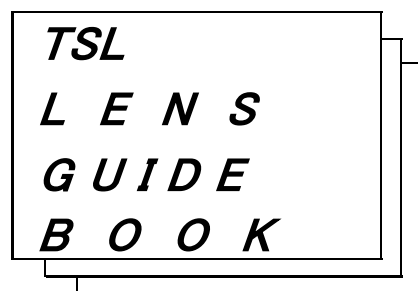

株式会社ティーエスエル

<https://www.tsl-opt.co.jp>